


# JIMMY JIB CAMERA CRANE

## SIZE SPECIFICATIONS

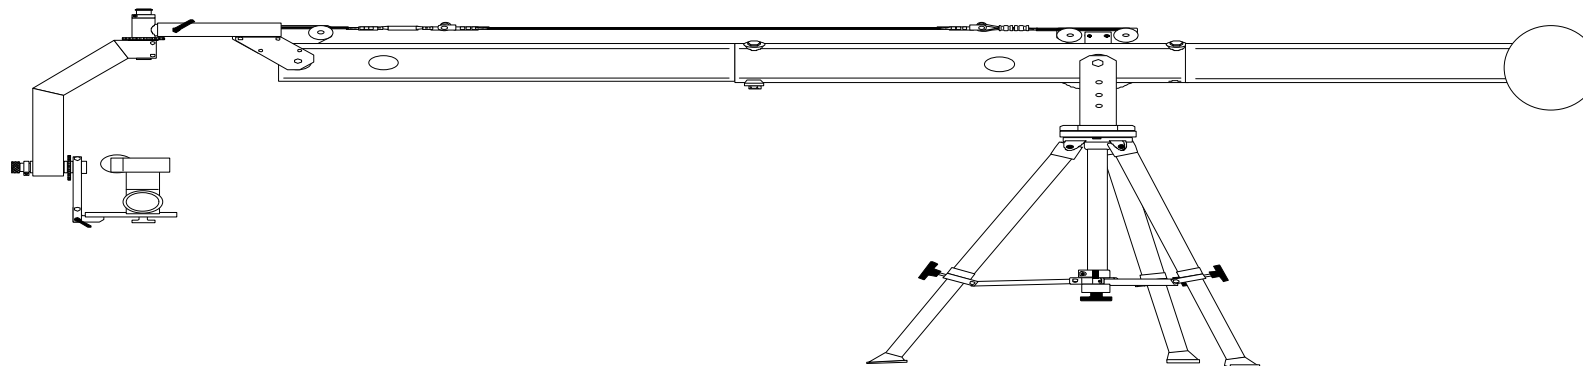

JIB SIZE	ARM LENGTH	MAX HEIGHT OVERHUNG	MAX HEIGHT UNDERSLUNG	FOOTPRINT * (RISER)	MAXIMUM PAYLOAD	AVERAGE * COUNTERWT.
STANDARD	6	13	9.75	6 FT X 8 FT	55 lbs.	125 lbs.
STD. PLUS	9	15	12	6 FT X 8 FT	50 lbs.	175 lbs.
GIANT	12	20	18	8 FT X 8 FT	45 lbs.	275 lbs.
LONG TAIL GIANT	12	20	18	9 FT X 12 FT	55 lbs.	200 lbs.
GIANT PLUS	15	22.5	20	9 FT X 12 FT	45 lbs.	225 lbs.
SUPER	18	25	23.25	9 FT X 12 FT	45 lbs.	250 lbs.
SUPER PLUS	24	30	28	12 FT X 12 FT	40 lbs.	285 lbs.
SHORT TAIL SUPER PLUS	24	30	28	9 FT X 12 FT	20 lbs.	360 lbs.
EXTREME	30	36	33.5	12 FT X 18 FT	25 lbs.	350 lbs.

- \* **Minimum** working platform area required - flat surface with toe rail.
- amount of counter weight required for a standard video camera with triax adapter
- Ω **Jib Tech and Operator required**

## CONOVER PRODUCTION SERVICES

116-M RESEARCH DRIVE MILFORD, CONNECTICUT 06460  
 (800) 442-JIBS (203) 877-5427 FAX: (203) 877-0646

© copyright 1998